


Adding Monitors

Monitors can be set up for devices. These monitors watch predefined events and let you know when these events have occurred.


Access the Device Monitors Tab

1. From the *Ubersmith Dashboard*, click **Devices**.

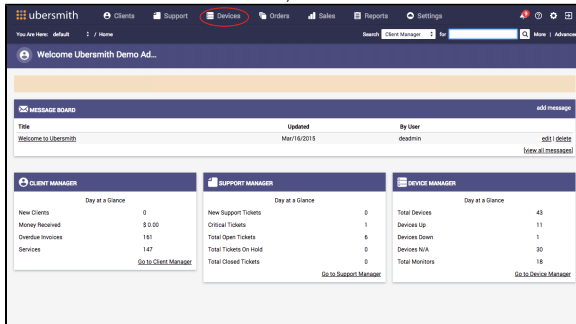


The *All Locations* page appears.

2. Select **Device** and click **List Devices**.

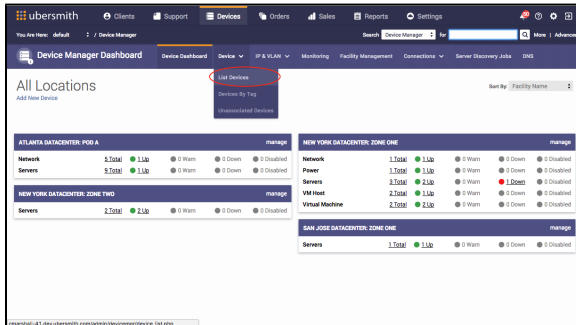


The *All Devices* page appears.

3. Click the device description for the device you want to add a monitor.

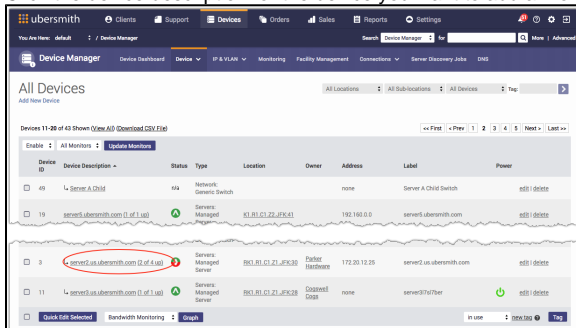

The *View Device* page appears.

4. Select **Monitors** and click **List Monitors**.

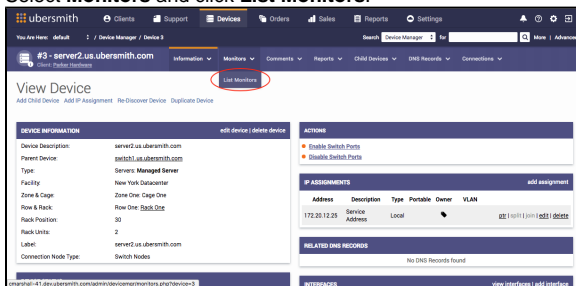

The *Device Monitors* tab appears.

On this page:


On this page:

- Access the Device Monitors Tab
- Complete the Add Monitor Page
- Complete the Details Tab
- Complete the Instructions Tab
- Complete the Config Tab
 - If your Monitor Protocol is TCP or SSL
 - If your Monitor Protocol is DNS
 - If your Monitor Protocol is Module
 - And the Module is Webserver Status
 - And the Module is Bandwidth Monitoring
 - And the Module is My SQL Status
 - And the Module is Reboot Control
 - And the Module is Server Metrics
- Related Topics

Complete the Add Monitor Page

1. Access the *Device Monitors* tab.

2. Click **Add Monitor**.

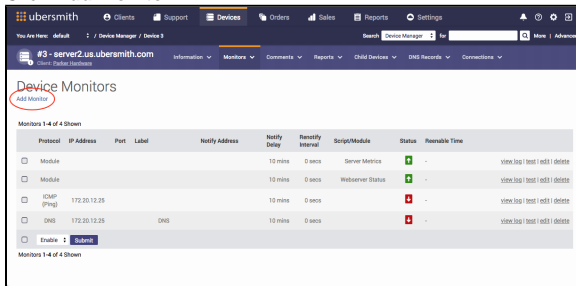

The *Add Monitor* page appears.


Complete the Details Tab

1. In the **Label** field, enter the name for the monitor.
2. In the **Protocol** field, select **TCP** to use a monitor script, **ICMP** to use ping or ICMP echo test, **DNS** to use a DNS query/resolution test, **SSL** to use test connections using SSL/TLS, or **Module** to use an Ubersmith device module. NOTE: See [Adding Monitor Types](#) for more information on monitor scripts. See [Adding Device Type Groups and Device Type Modules](#) for more information on modules.
3. In the **Address** field either select the IP address you want to monitor, or click edit and manually enter the IP address.
4. In the **Max Packet Loss** field, enter the upper threshold of packet loss, in percentage, to be alerted. NOTE: This is an ICMP field.
5. In the **Module** field, select the appropriate monitoring module. NOTE: This is a Module field
6. In the **Port** field, enter the port to monitor. NOTE: This is a TCP and SSL field.
7. In the **Script** field, select the appropriate script for the monitor. NOTE: This is a TCP and SSL field.
8. In the **Notify Address** field, enter the email address to notify when the monitor is in a failed state. Use commas to specify multiple addresses.
9. In the **Notify Delay** field, enter the amount of time to wait after the device first stops responding before sending an initial notification, then select the unit of time.
10. In the **Notify Interval** field, enter the amount of time to wait before sending out additional email notifications, then select the unit of time.
11. In the **Notify Downstream Device Owners** field, select **Yes** to notify the device's child device owners of the failure, select **No** to disregard child devices.
12. In the **Notify When Monitor Comes Back Up** field, select one of the following:
13. **Never** to never send notifications when the monitor returns up from a down or warning state.
14. **From Warn** to send a notification when the monitor returns up from a warning state.
15. **From Down** to send a notification when then monitor returns up from a down state.
16. **From Warn and Down** to send a notification when the monitor returns up from a warning or down state.

Complete the Instructions Tab

1. Click **Instructions**.

2. In the **Extra Instructions** field, enter any text to provide additional information or instructions to persons responding to a problem with the device.

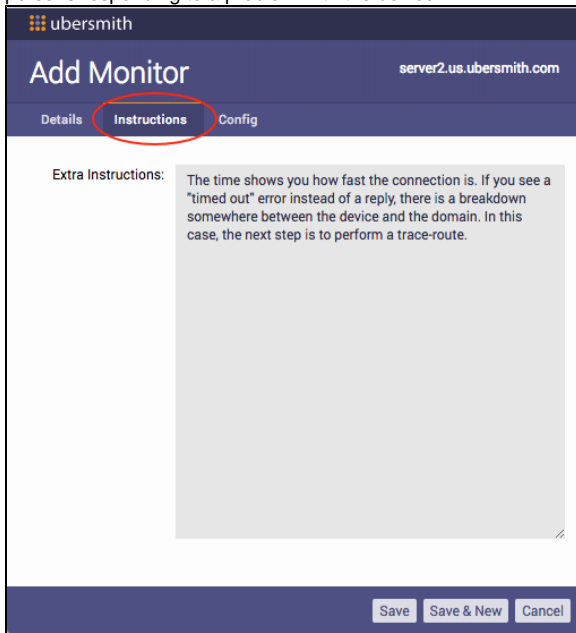


The screenshot shows the 'Add Monitor' form in the ubersmith interface. The 'Instructions' tab is selected and highlighted with a red circle. The 'Extra Instructions' field contains the following text: 'The time shows you how fast the connection is. If you see a "timed out" error instead of a reply, there is a breakdown somewhere between the device and the domain. In this case, the next step is to perform a trace-route.' The form also has 'Details' and 'Config' tabs, and buttons for 'Save', 'Save & New', and 'Cancel' at the bottom.

Complete the Config Tab

You can configure constraints for device modules or one-off configurations for monitor scripts. For example, the bandwidth monitoring device module allows alerts to be sent based on traffic rates. The environmental monitoring module allows temperature and humidity alerts to be sent. Fields on this tab are based on the monitor protocol being configured, and have previously been configured on the [Monitor Types](#) page.

1. Click **Config**.
2. Click **Save** after the appropriate configurations are set.

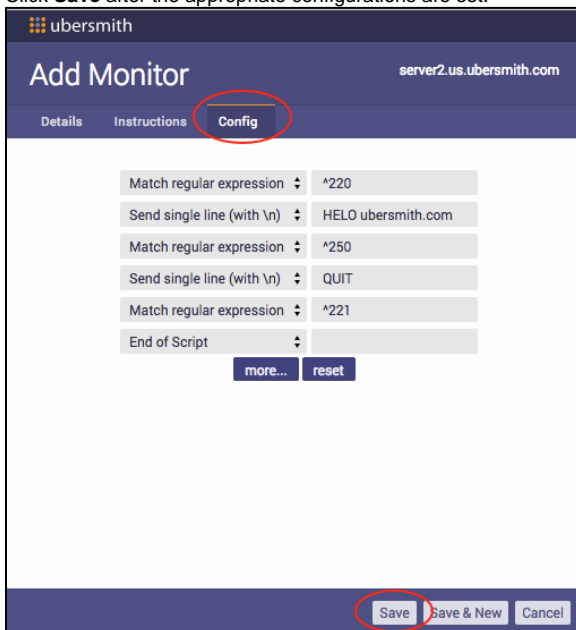

The screenshot shows the 'Add Monitor' form in the ubersmith interface, with the 'Config' tab selected and highlighted with a red circle. The form displays several configuration fields: 'Match regular expression' (set to '^220'), 'Send single line (with \n)' (set to 'HELO ubersmith.com'), 'Match regular expression' (set to '^250'), 'Send single line (with \n)' (set to 'QUIT'), 'Match regular expression' (set to '^221'), and 'End of Script'. There are 'more...' and 'reset' buttons below these fields. The 'Save' button at the bottom is also highlighted with a red circle.

If your Monitor Protocol is TCP or SSL

The *Config* tab for both TCP and SSL contains default fields based on the selected script. NOTE: refer to [Monitor Types](#) for adding customized scripts to this tab.

1. Make any necessary changes to tailor the script for your device.
2. Click **more** to add more fields.

3. Click **reset** to return the *Config* tab to its default settings.

The screenshot shows the 'Add Monitor' page in the ubersmith interface. The 'Config' tab is selected, displaying a list of SMTP commands and their corresponding regular expressions. The 'more...' and 'reset' buttons are circled in red.

Match regular expression	Send single line (with \n)
*220	HELO ubersmith.com
*250	QUIT
*221	

End of Script

[more...](#) [reset](#)

[Save](#) [Save & New](#) [Cancel](#)

If your Monitor Protocol is DNS

1. In the **Query** field, enter the DNS record name to query.
2. In the **Query Type** field, select the DNS record type to query, for example 'A'.
3. In the **Min results** field, enter the minimum number of expected results.
4. In the **Max results** field, enter the maximum number of expected results.
5. In the **Match Regex** field, enter a regular expression to test the output from the DNS lookup.

The screenshot shows the 'Add Monitor' page in the ubersmith interface. The 'Config' tab is selected, displaying fields for Query, Query Type, Min results, Max results, and Match Regex.

Query: Sample

Query Type: A

Min results: 10

Max results: 50

Match Regex: This is a sample

[Save](#) [Save & New](#) [Cancel](#)

If your Monitor Protocol is Module

And the Module is Webserver Status

1. In the **Maximum Active Connections** field, enter the number of connection to monitor.

ubersmith

server2.us.ubersmith.com

Add Monitor

Details Instructions **Config**

Maximum Active Connections: 25

Save Save & New Cancel

And the Module is **Bandwidth Monitoring**

Note: the numbers next to each field display the current data as of the last polling run.

1. In the **Minimum bps inbound** field, enter the inbound minimum bits per second to monitor.
2. In the **Maximum bps inbound** field, enter the inbound maximum bits per second to monitor.
3. In the **Minimum bps outbound** field, enter the outbound minimum bits per second to monitor.
4. In the **Maximum bps outbound** field, enter the outbound maximum bits per second to monitor.
5. In the **Minimum bps total** field, enter the total minimum bits per second to monitor.
6. In the **Maximum bps total** field, enter the total maximum bits per second to monitor.
7. In the **Expected eth0 Port Status** field, select **Up**, **Down**, or **Testing**. If something other than your chosen status is returned, the monitor will fail.

ubersmith

server2.us.ubersmith.com

Add Monitor

Details Instructions **Config**

Minimum bps inbound: 100000000 (3274899.4 bps)

Maximum bps inbound: 100000000 (3274899.4 bps)

Minimum bps outbound: 100000000 (2817886.5 bps)

Maximum bps outbound: 100000000 (2817886.5 bps)

Minimum bps total: 100000000 (6092785.9 bps)

Maximum bps total: 100000000 (6092785.9 bps)

Expected eth0 Port Status: Up (UP)

Save Save & New Cancel

And the Module is **My SQL Status**

1. In the **Is this a slave database host** field, select either **Yes** or **No**.
2. In the **Maximum Slave Delay** field, enter the maximum number of seconds for the delay.
3. In the **Minimum Slave Processing Rate** field, enter the minimum number or writes per second.

4. In the **Warn if active connections are greater than** field, enter the percent of active connection to warn.

The screenshot shows the 'Add Monitor' configuration page for a database host. The page has a dark blue header with the 'ubersmith' logo and the URL 'server2.us.ubersmith.com'. Below the header are three tabs: 'Details', 'Instructions', and 'Config'. The 'Config' tab is selected. The main content area contains the following fields:

- 'Is this a slave database host?' with radio buttons for 'Yes' and 'No' (selected).
- 'Maximum Slave Delay:' with a text input '30' and a label 'seconds'.
- 'Minimum Slave Processing Rate:' with a text input '50' and a label 'writes/s'.
- 'Warn if active connections are greater than:' with a text input '75' and a label '% of max_connections'.

At the bottom right, there are three buttons: 'Save', 'Save & New', and 'Cancel'.

And the Module is Reboot Control

1. In the **Minimum draw (A)** field, enter the minimum amount of power the device is drawing to monitor.
2. In the **Maximum draw (A)** field, enter the maximum amount of power the device is drawing to monitor.
3. In the **Minimum percentage draw (%)** field, enter the minimum percentage amount of power the device is drawing to monitor.
4. In the **Maximum percentage draw (%)** field, enter the maximum percentage amount of power the device is drawing to monitor.

The screenshot shows the 'Add Monitor' configuration page for a power module. The page has a dark blue header with the 'ubersmith' logo and the URL 'server2.us.ubersmith.com'. Below the header are three tabs: 'Details', 'Instructions', and 'Config'. The 'Config' tab is selected. The main content area contains the following fields:

- 'Minimum draw (A):' with a text input '50'.
- 'Maximum draw (A):' with a text input '100'.
- 'Minimum percentage draw (%):' with a text input '30'.
- 'Maximum percentage draw (%):' with a text input '75'.

At the bottom right, there are three buttons: 'Save', 'Save & New', and 'Cancel'.

And the Module is Server Metrics

Some fields are based on the SNMP output for the device, while the rest are generic. The generic fields are explained below.

Note: the numbers next to each field display the current data as of the last polling run.

1. In the **Minimum ram usage** field, enter the minimum megabytes of ram usage to monitor.
2. In the **Maximum ram usage** field, enter the maximum megabytes of ram usage to monitor.

3. In the **Minimum virtual memory usage** field, enter the minimum megabytes of virtual memory usage to monitor.
4. In the **Maximum virtual memory usage** field, enter the maximum megabytes of virtual memory usage to monitor.
5. In the **Maximum hard disk usage** field, enter the maximum percentage of hard disk usage to monitor.
6. In the **Minimum cpu usage** field, enter the minimum percentage of CPU usage to monitor.
7. In the **Maximum cpu usage** field, enter the maximum percentage of CPU usage to monitor.
8. In the **Minimum I/O Wait %** field, enter the minimum percentage of input/output wait time to monitor.
9. In the **Maximum I/O Wait %** field, enter the maximum percentage of input/output wait to monitor.
10. In the **Minimum Disk I/O transfer** field, enter the minimum bits per second of disk input/output wait to monitor.
11. In the **Maximum Disk I/O transfer** field, enter the maximum bits per second of disk input/output wait to monitor.
12. In the **Minimum Disk I/O operations** field, enter the minimum disk input/output operations to monitor.
13. In the **Maximum Disk I/O operations** field, enter the maximum disk input/output operations to monitor.
14. In the **Maximum System Load** field, enter the maximum system load to monitor.

ubersmith

Add Monitor

server2.us.ubersmith.com

Details

Instructions

Config

Minimum ram usage:	4000	MB (3656 MB)
Maximum ram usage:	7000	MB (3656 MB)
Minimum virtual memory usage:	200	MB (131 MB)
Maximum virtual memory usage:	400	MB (131 MB)
Maximum hard disk usage:	45	% (17.92%)
Maximum hard disk usage for "/":	40	% (24.31%)
Maximum hard disk usage for "/dev/shm":	50	% (0.00%)
Maximum hard disk usage for "/boot":	50	% (28.66%)
Maximum hard disk usage for "/home":	25	% (16.44%)
Minimum cpu usage:	25	% (12.5%)
Maximum cpu usage:	50	% (12.5%)

Save

Save & New

Cancel

Related Topics

[Managing Monitors](#)

[Adding Monitor Types](#)

[Managing Monitor Types](#)

[Using the Monitoring Dashboard](#)