


Managing Facilities

Once you have created facilities, you can either edit or delete them. You can also add and delete zones and view existing cages inside the zones.

Adding Zones

Zones are added to existing facilities from the Device Locations page.

1. [Access the Device Locations page.](#)
2. Click **add zone** in the desired facility's row.

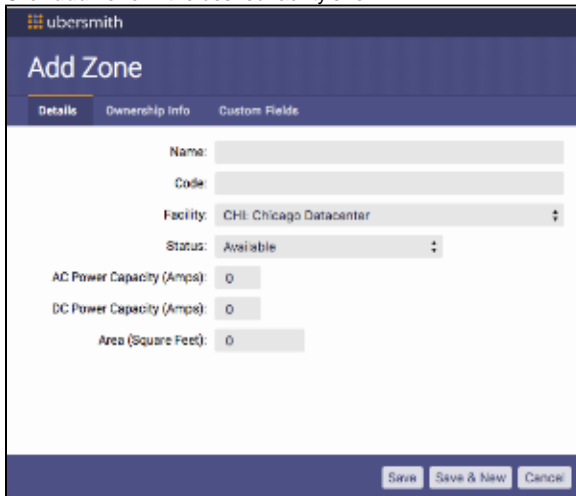

The *Add Zone* page appears.

Complete the Details tab

1. In the **Name** field, enter the name of the facility.
2. In the **Code** field, enter an alpha-numeric code to identify the facility.
3. In the **Facility** field, select the facility the zone is located in.
4. In the **Status** field, select an option.
 - Select **Available** if the facility is available.
 - Select **Inactive** if the facility is inactive.
 - Select **Internal Reserved** if the facility is reserved for yourself.
 - Select **Internal Occupied** if the facility is occupied by you.
 - Select **Customer Right of First Refusal** if the facility must first be offered to the listed client before it can be made available to any other client.
 - Select **Customer Occupied** if the facility is already occupied by the listed customer.
5. In the **RoFR Expiration Date** field, enter the date that the client's right of first refusal expires.
6. In the **Assigned Date** field, enter the date the facility was assigned to the corresponding status.



Note

- The RoFR Expiration Date and Assigned Date field only display if the customer right of first refusal or customer occupied status is selected.
- If the status for the facility is reserved or occupied, the zone status automatically inherits the same value.

7. In the **AC Power Capacity (Amps)** field, enter the AC power capacity of the facility.
8. In the **DC Power Capacity (Amps)** field, enter the DC power capacity of the facility.

On this page:

On this page:

- [Adding Zones](#)
- [Complete the Details tab](#)
- [Complete the Ownership Info tab](#)
- [Viewing Cages](#)
- [Editing Facilities](#)
- [Editing Zones](#)
- [Deleting Facilities and Zones](#)
- [Related Topics](#)

9. In the **Area (Square Feet)** field, enter the facility's square feet area.

ubersmith

Add Zone

Details Ownership Info Custom Fields

Name: Zone 1

Code: Z1

Facility: CHI, Chicago Datacenter

Status: Internal Reserved (inherited from Facility Chicago Datacenter)

AC Power Capacity (Amps): 500

DC Power Capacity (Amps): 500

Area (Square Feet): 1000

Save Save & New Cancel

Complete the Ownership Info tab

1. Click the *Ownership Info* tab.
2. In the **Search** field, select the type of information you want to find, such as a client ID number or client name.
3. In the **For** field, enter the criteria based on the input selected in the search field.
4. Click **Search**.
5. In the *Search Results* section, select the desired search result.
6. In the *Select Service* section, select the corresponding service.

ubersmith

Add Zone

Details **Ownership Info** Custom Fields

Select a client to associate this zone with

Find a Client

Search Client ID #

For 1045

Search

Search Results

No client selected

1045 Office Solutions
1234 Central Avenue Albany, NY
12201 United States

Select Service

260: Managed Server (mang)

Save Save & New Cancel

Complete the Custom Fields tab

1. Click the *Custom Fields* tab.
2. If you have any custom facility fields set up in your *Ubersmith* instance, they will display here. See Adding Custom Location Fields.

3. Click **Save** or **Save & New**.

The screenshot shows the 'Add Zone' form in the ubersmith application. The 'Custom Fields' tab is selected and highlighted with a red circle. The 'Communication Pathway' dropdown is set to 'Inbound'. At the bottom, the 'Save' and 'Save & New' buttons are highlighted with a red circle.

Viewing Cages

1. Access the [Device Locations](#) page.

The screenshot shows the 'Device Locations' page in the ubersmith application. The table displays various locations and their status. The 'Default Zone' row is highlighted with a red circle.

Location	Ownership	Status	
ATL Atlanta Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
P.B. Pod A	None	Available (Partially Occupied)	00001-1451-00000
Pod A - Mounted / Carrier Space	None	Internal Reserved	00001-1451-00000
Pod A - Wall Mounted Panel Space	None	Internal Reserved	00001-1451-00000
P.B. Pod B	None	Available	00001-1451-00000
DH Chicago Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
Default Zone	None	Available (Partially Occupied)	00001-1451-00000
Z1 Zone 1	None	Internal Reserved	00001-1451-00000
JFK New York Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
Z1 Zone Data	None	Available (Partially Occupied)	00001-1451-00000
Z2 Zone Two	None	Available (Partially Occupied)	00001-1451-00000
SJC San Jose Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
Z1 Zone Data	None	Available (Partially Occupied)	00001-1451-00000

The *Device Zone* page appears displaying any existing cages with any corresponding rows and racks.

Editing Facilities

1. Access the [Device Locations](#) page.
2. Click **edit** in the facility's row you need to edit.

The screenshot shows the 'Device Locations' page in the ubersmith application. The 'Default Zone' row is highlighted with a red circle, and the 'edit' button is visible in the top right corner of the row.

Location	Ownership	Status	
ATL Atlanta Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
P.B. Pod A	None	Available (Partially Occupied)	00001-1451-00000
Pod A - Mounted / Carrier Space	None	Internal Reserved	00001-1451-00000
Pod A - Wall Mounted Panel Space	None	Internal Reserved	00001-1451-00000
P.B. Pod B	None	Available	00001-1451-00000
DH Chicago Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
Default Zone	None	Available (Partially Occupied)	00001-1451-00000
Z1 Zone 1	None	Internal Reserved	00001-1451-00000
JFK New York Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
Z1 Zone Data	None	Available (Partially Occupied)	00001-1451-00000
Z2 Zone Two	None	Available (Partially Occupied)	00001-1451-00000
SJC San Jose Datacenter	None	Available (Partially Occupied)	405.2000-1451-00000
Z1 Zone Data	None	Available (Partially Occupied)	00001-1451-00000

The *Edit Facility* page appears.

- From the *Edit Facility* page, make any necessary updates you need.

ubersmith

Edit Facility: Chicago Datacenter

Details Ownership Info Provider Info Address Custom Fields

Name: Chicago Datacenter

Code: CHI

Status: Available (Partially Occupied)

AC Power Capacity (Amps): 1000

DC Power Capacity (Amps): 1000

Area (Square Feet): 1500

Save Cancel

- Click **Save**.

Editing Zones

- Access the *Device Locations* page.
- Click **edit** in the zone's row you need to edit.

ubersmith

Device Locations

Define locations to identify your devices.

Location	Ownership	Status	
ATL Atlanta Datacenter	None	Available (Partially Occupied)	08/01/2018 - 08/01/2018
P.A.Dat.A	None	Available (Partially Occupied)	08/01/18 - 08/01/18
Dat.A-Media / Center Space	None	Internal Reserved	08/01/18 - 08/01/18
Dat.A-Well Mounted Panel Space	None	Internal Reserved	08/01/18 - 08/01/18
P.A.Dat.B	None	Available	08/01/18 - 08/01/18
CHI Chicago Datacenter	None	Available (Partially Occupied)	08/01/2018 - 08/01/2018
Default_Zone	None	Available (Partially Occupied)	08/01/18 - 08/01/18
Z1_Zone.1	None	Internal Reserved	08/01/18 - 08/01/18
JFK New York Datacenter	None	Available (Partially Occupied)	08/01/2018 - 08/01/2018
Z1_Zone.Dat	None	Available (Partially Occupied)	08/01/18 - 08/01/18
Z2_Zone.Dat	None	Available (Partially Occupied)	08/01/18 - 08/01/18
SJC San Jose Datacenter	None	Available (Partially Occupied)	08/01/2018 - 08/01/2018
Z1_Zone.Dat	None	Available (Partially Occupied)	08/01/18 - 08/01/18

The *Edit Zone* page appears.

- From the *Edit Zone* page, make any necessary updates you need.

ubersmith

Edit Zone: Zone 1

Details Ownership Info Custom Fields

Name: Zone 1

Code: Z1

Facility: CHI Chicago Datacenter

Status: Internal Reserved

Assigned Date: Oct/07/2018

AC Power Capacity (Amps): 500

DC Power Capacity (Amps): 500

Area (Square Feet): 1000


Save Cancel

- Click **Save**.

Deleting Facilities and Zones

- Access the *Device Locations* page.

2. Click **delete** in the facility's or zone's row you need to delete.

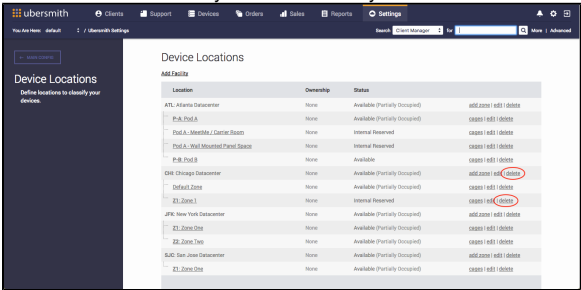

- A warning message appears.
3. Click **Yes**.

Related Topics

[Adding Locations](#)

[Managing Zones](#)

[Adding Custom Location Fields](#)

[Managing Custom Location Fields](#)