

# Configuring VM Management


The VM Management service module enables actions to be taken on virtual machines based on the state of its associated service.

In order to begin billing for this service, you need to configure Ubersmith. Once all the necessary pieces have been configured, any current or new service based on the service plan will be ready. The configuration steps are as follows:

1. [Associate the VM management service plan to another appropriate service.](#)
2. [Configure the Virtual Machine device module.](#)
3. [Create an actual VM to create individual devices from.](#)
4. [Configure a virtual machine host device.](#)
5. [Add the \*\*VM Management\*\* service module to your service plan.](#)
6. Configure the service module (below).
7. Configure the service plan with the service module fields.
8. [Associate your virtual machine device to your service.](#)

## Configuring the Service Module

1. In the **On Service Suspension** field, select either Disable VM or Do Nothing.
2. In the **On Service Unsuspension** field, select either Enable VM or Do Nothing.
3. In the **On Service Cancellation** field, select either Disable VM, Destroy VM or Do Nothing.
4. In the **On Service Reactivation** field, select either Enable VM or Do Nothing.
5. In the **On Service End** field, select either Disable VM, Destroy VM or Do Nothing.
6. In the **On Service Deactivation** field, select either Disable VM, Destroy VM or Do Nothing.

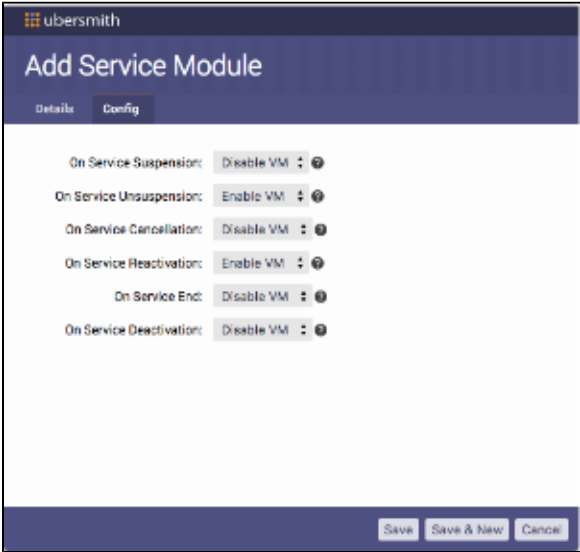

The screenshot shows the 'Add Service Module' configuration page in the Ubersmith interface. The page has a dark blue header with the 'ubersmith' logo and the title 'Add Service Module'. Below the header, there are two tabs: 'Details' and 'Config', with 'Config' being the active tab. The main content area is white and contains six configuration rows, each with a label and a dropdown menu. The labels are: 'On Service Suspension:', 'On Service Unsuspension:', 'On Service Cancellation:', 'On Service Reactivation:', 'On Service End:', and 'On Service Deactivation:'. The dropdown menus are currently set to 'Disable VM', 'Enable VM', 'Disable VM', 'Enable VM', 'Disable VM', and 'Disable VM' respectively. At the bottom of the page, there are three buttons: 'Save', 'Save & New', and 'Cancel'.

### On this page:

On this page:

- [Configuring the Service Module](#)
- [Related Topics](#)

## Related Topics

[Managing Service Plans](#)

[Associating a Device with a Client and a Service](#)