


# Using Plugins

A plugin allows you to add additional functionality on top of the core Ubersmith system. Written with the Ubersmith SDK, plugins extend and add features at specific areas in Ubersmith. You can create your own plugin as well as use plugins provided by Ubersmith. See [Creating Plugins](#) for developing and installing plugins, and [Enabling Plugins \(below\)](#), for enabling and configuring .

## Enabling Plugins


### Access the Plugins Page

1. From the *Ubersmith Dashboard*, click **Settings**.

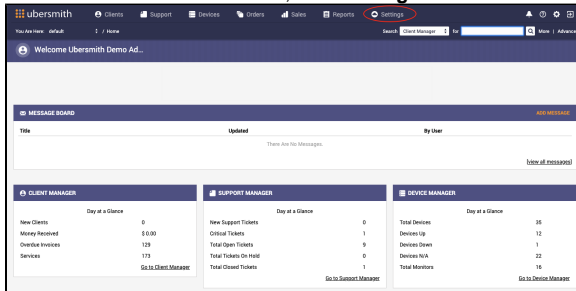

The *Ubersmith Settings* page appears.


2. From the *Global Settings* section, from the *Customization* section, click **Plugins** .

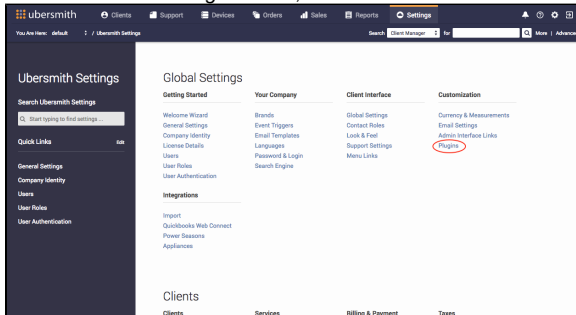

The *Plugins* page appears.


### Complete the Plugin Details Section

1. On the *Plugins* page, click the plugin you want to enable.

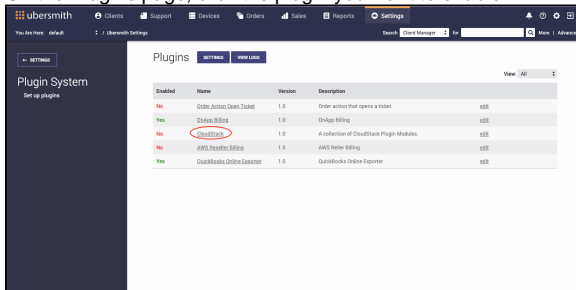

The *Plugin* page appears.

2. In the *Plugin Details* section, click **Disabled** to toggle the plugin to enabled.

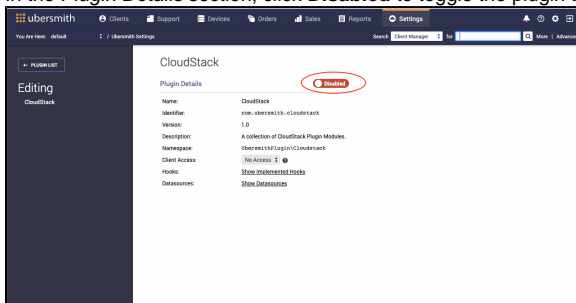


A confirmation message appears.

On this page:


On this page:

- [Enabling Plugins](#)
- [Access the Plugins Page](#)
- [Complete the Plugin Details Section](#)
- [Complete the Modules Section](#)
- [Viewing Plugin Usage](#)
- [Related Topics](#)


### 3. Click Yes.

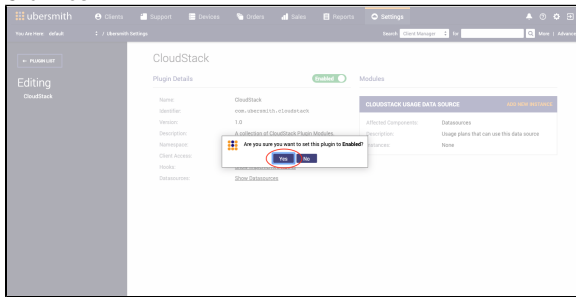

4. In the **Client Access** field, select **No Access** for the plugin to be hidden from the Client Portal, select **View** for the plugin to be seen from the Client Portal, and **Edit** for the plugin to be changed from the Client Portal.

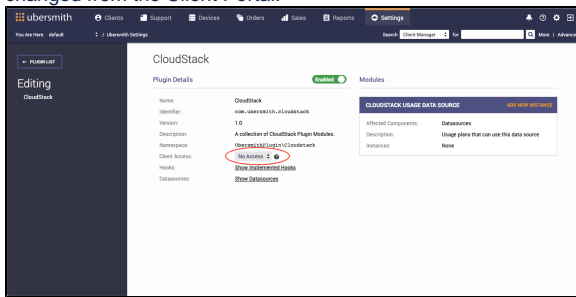


5. The Hooks and Datasources sections are toggles to either show or hide their respective implemented hooks or data sources used by the plugin.

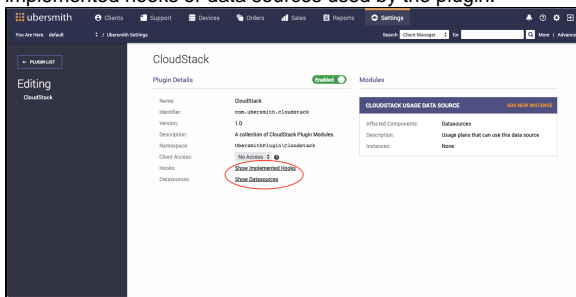

## Complete the Modules Section


Modules configure the plugin's system hooks. For example, if a module has the brand component, you can add an instance for multiple brands with the same configurations. Alternatively, you can add two separate module instances for two separate brands, each with different configurations. An instance is an entire plugin. You can have multiple instances of a given plugin, each one with different configuration options.

1. Click **add new instance**.

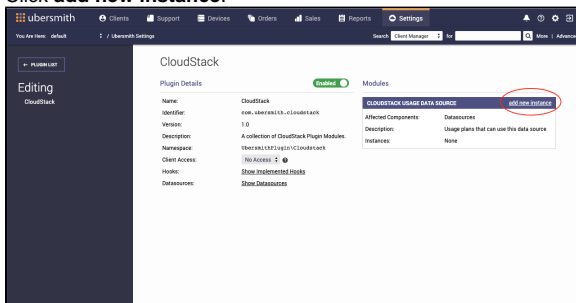


The *Add New Instance* section displays.

## 2. Click **Select datasources**.

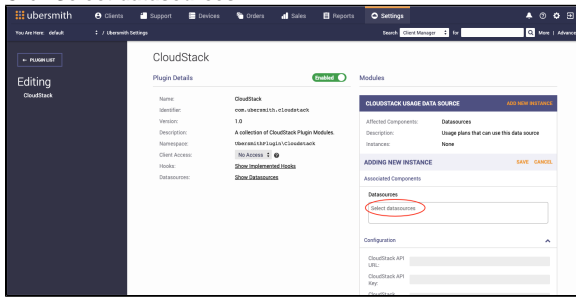

The data sources field expands to list all available data sources

## 3. In the **Datasources** field, select **Apply to all** to select all listed data sources, or select the individual data sources you want to apply to the plugin. Click in the **Datasources** field again to toggle it closed.

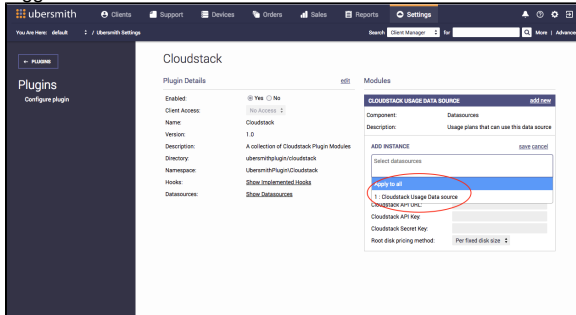

## 4. In the **Configuration** section, select the appropriate settings for each field. This section displays different fields, based on the enabled plugin.

[Configuring AWS Reseller Billing](#)

[Configuring CloudStack Plugin Modules](#)


[Configuring the OnApp Billing Plugin](#)

[Configuring QuickBooks Online Exporter](#)


[Configuring the Open Ticket Order Action Plugin Module](#)

[Configuring Payment Gateway Templates Plugin](#)

[Configuring the PayPal Exporter Plugin](#)

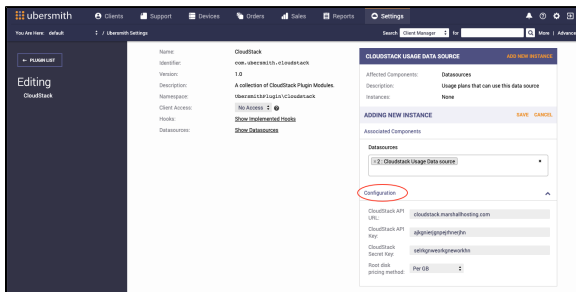


## 5. Click **Save**.

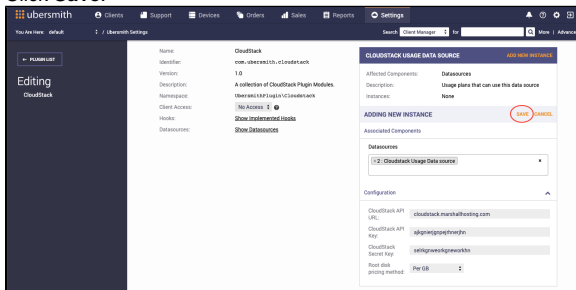

Viewing Plugin Usage

- In the *Plugin Usage* section, click **Show Datasources Used** to toggle the data sources used on. This field either shows or hides the data sources used by the plugin.

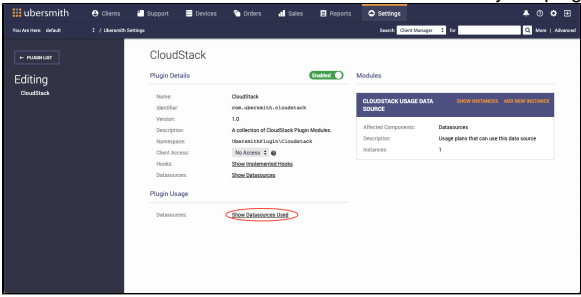

## Related Topics

[Managing Service Plans](#)