


# Configuring Plugin Settings

The *Plugin Logger* tracks what PluginSystem hooks are being fired and how your plugins are reacting to them. For more information on how the logger functions, see [Creating Plugins](#).


## Access the Plugin Settings Page

1. From the *Ubersmith Dashboard*, click **Settings**.

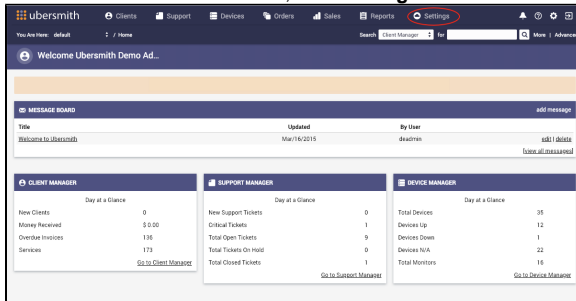


The *Ubersmith Settings* page appears.

2. From the *Global Settings* section, click **Plugins** from the *Customization* column.

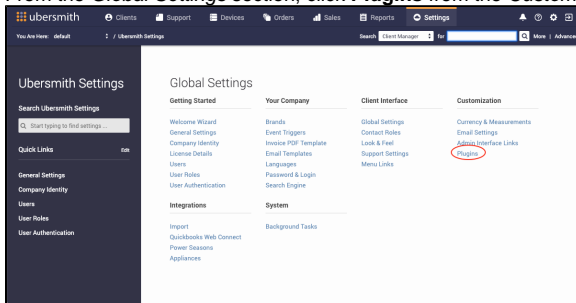


The *Plugins* page appears.

3. On the *Plugins* page, click **Settings**.

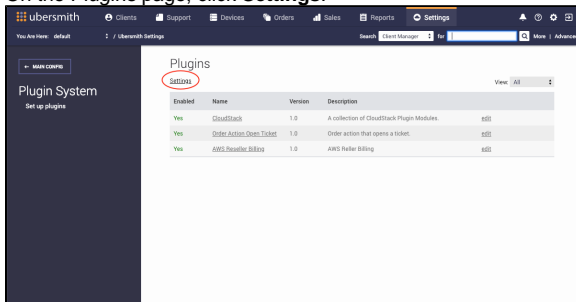

## Complete the Plugin Logger – On or Off Section

- In the **Enable Logger** field, select **Yes** to turn the *Plugin Logger* on.

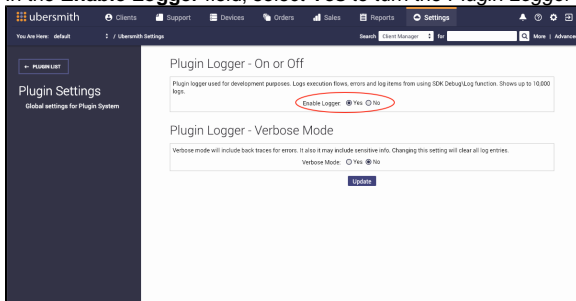

## Complete the Plugin Logger – Verbose Mode Section


If you enable the verbose mode, all previous log entries will be removed.

### On this page:

On this page:


- [Access the Plugin Settings Page](#)
- [Complete the Plugin Logger – On or Off Section](#)
- [Complete the Plugin Logger – Verbose Mode Section](#)
- [Save Your Configuration Settings](#)
- [Related Topics](#)

1. In the **Verbose Mode** field, select **Yes**.

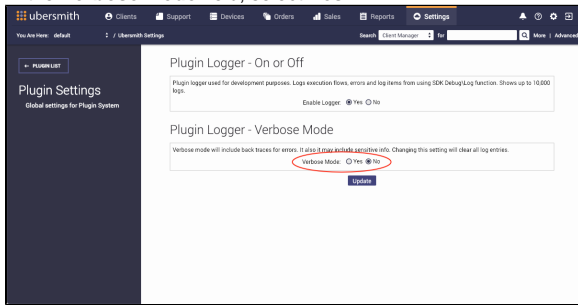


A confirmation message appears.

2. Click **Yes**.

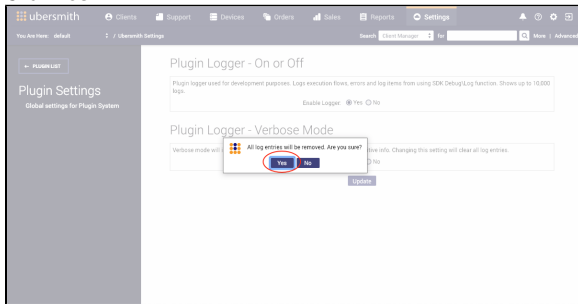

## Save Your Configuration Settings

- Click **Update**.

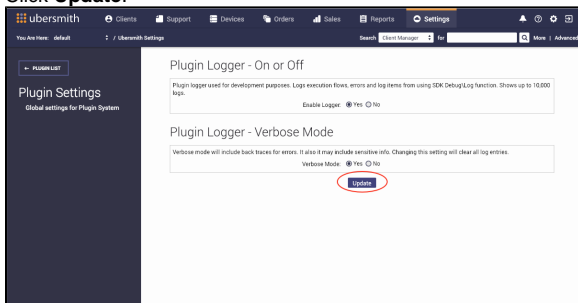

## Related Topics

[Managing the Plugin Logger](#)

[Using Plugins](#)